

The Original Giles Tactical Sling



Installation procedure for:

Steyr AUG/USR, MSAR STG-556, TPD AXR and similar

Your sling has been assembled just as if it were on your rifle. Before disassembling it for installation, observe the locations of the buckles and straps for reference when completing the installation.

Disassembly of the packaged sling:

- Remove buckle **C** from the end, then pull the sling end out of the looplock slider **B**. Remove buckle **D**. *No further disassembly is required or recommended.*

Assembly on your weapon:


- At every step be sure the sling body is straight, not twisted.
- Pass the free running end of strap **A** (the sling body) through the rear sling swivel, then slide on buckle **D**. Pass strap **A** forward through looplock slider buckle **B**, then slide on buckle **C** to a point 7" from the end. Run the sling strap through the front sling swivel, then bring the end backward over the top and secure it through buckle **C**. Pass the sling end through the buckle to secure it, having about 3" pulled through for a margin of safety.

Function:

- Buckle **D** acts as a stop preventing the slider buckle from travelling farther to the rear and keeping the weapon supported at the chest.
- Buckle **E** adjusts the overall length of the sling.
- With the weapon resting in the vertical hands-free position, adjust buckles **D** and **E** until the butt of the weapon rests slightly below the armpit. When the weapon is brought up on target the sling should be adjusted so the butt comes to rest naturally in the shoulder pocket without any restriction of movement.

WARNING:

Mishandling of firearms may cause serious injury or death. Before practicing with your Original Giles Tactical Sling™ make sure your weapon is unloaded and pointed in a safe direction. When handling the firearm, make sure your index finger remains straight along the weapon's frame and not in contact with the trigger! **Do not touch the trigger until your sights are on the target and you are ready to fire.** If the sling interferes with the safe operation or handling of the weapon, discontinue use. For further safety considerations, consult the owner's manual of your weapon and seek professional assistance.

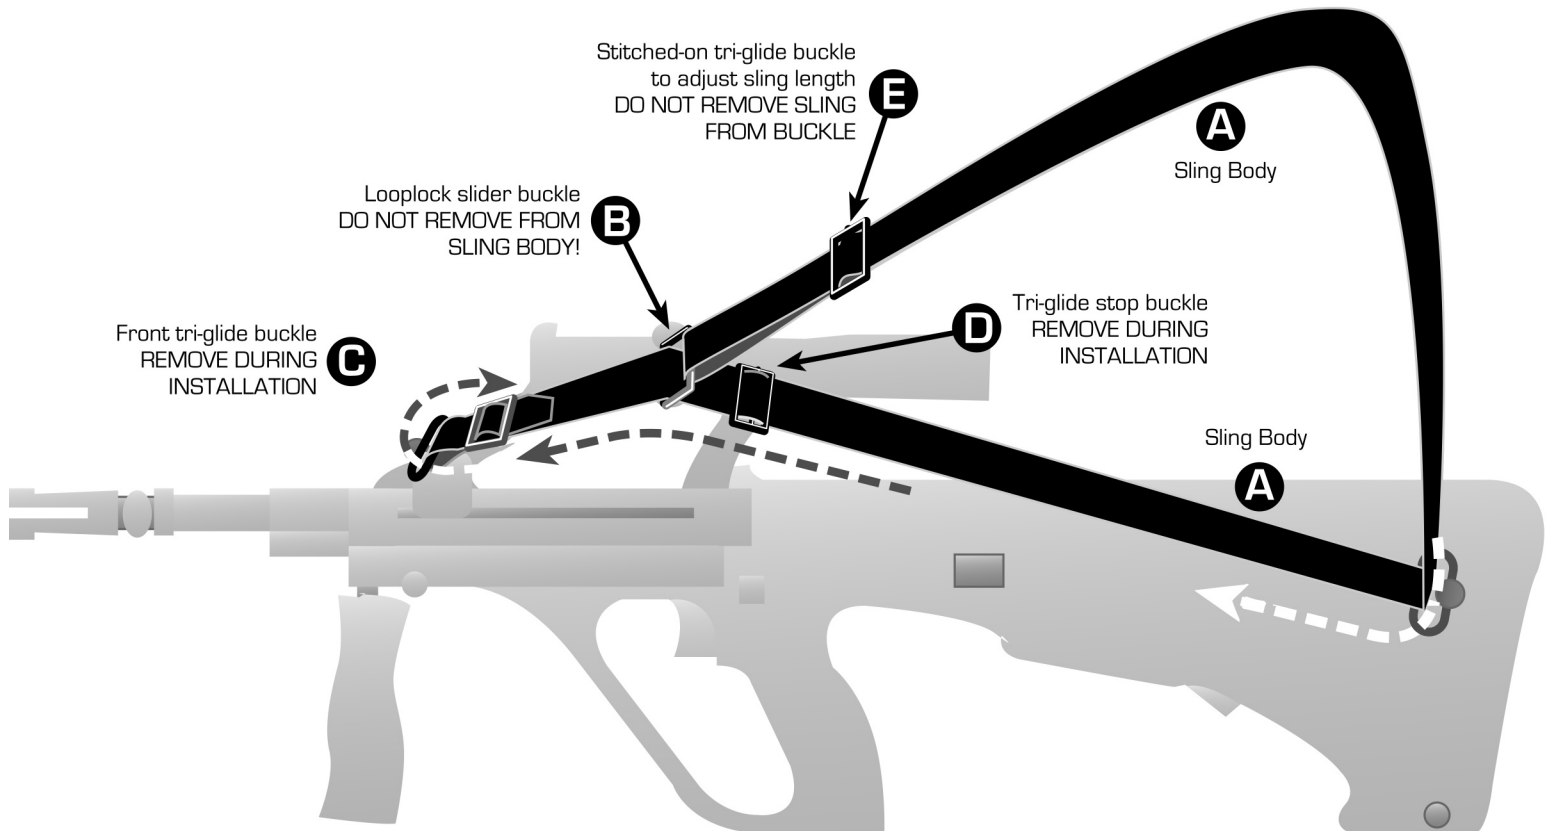

© 2010 All rights reserved.

Reproduction in whole or in part is prohibited.

Wilderness Tactical Products, LLC • Wilderness Plaza • 1608 W. Hatcher Rd. • Phoenix, AZ 85021
www.thewilderness.com • Call for a dealer near you! Questions/inquiries: 602/242-4945
Toll free order line: 1-800/775-5650 • Fax line: 602/242-8260

082510