

The Original Giles Tactical Sling





Installation procedure for:

H&K submachineguns and rifles w. Fixed or Collapsible Buttstocks, including MP5, G3/HK-91, G33/HK-93, etc.
***Will not fit MP5F ambi pins**

The Wilderness Original Giles Tactical Sling® attaches at the front of HK weapons with a metal snaphook. It is very important that this hook face down when installed. When installed facing up there is a strong possibility of the snaphook becoming disengaged in use. To attach correctly, simply press the hook downward through the weapon's eyelet attachment point. The spring-loaded gate will snap shut when the hook has passed through the eyelet far enough. Manually depress this gate to release the hook from the eyelet.

Forend installation

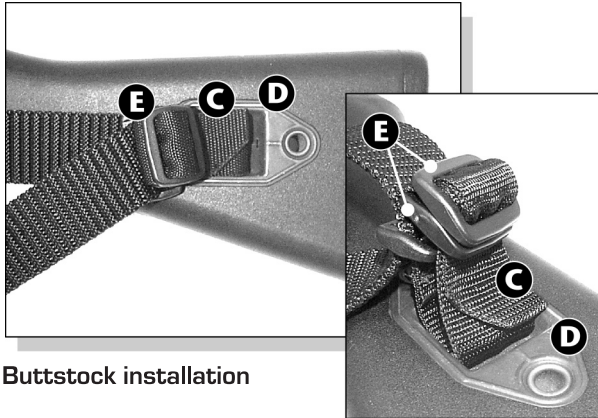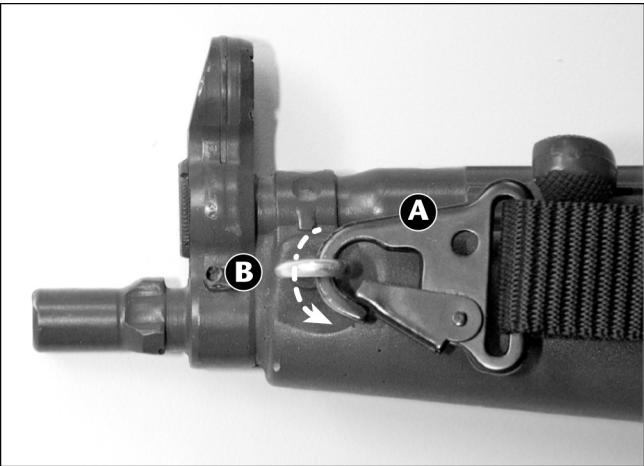


Buttstock installation

Delrin® buckles are doubled for maximum strength on the rear attachment point. This may, at first, make the installation process appear more complex. However, if the multiple buckles are treated as a single unit the installation is actually no different than threading the single buckles on any of our other sling systems.

Pass webbing strap C through buttstock loop D from front to back. After pulling through fully, pass the end of strap C up through buckles E from the bottom, treating them as one buckle. Pass C down through the opposing open slot on the buckles so it passes out the bottom facing the front of the weapon. Wrap strap C back over the top of the buckles, or pass between the buckles for more friction as shown, and pass it down through the first slot. It should be snug with about 1.5" of webbing left as a tab.

The completed Giles Tactical HK Sling® should look like this when properly installed on an MP5A2.

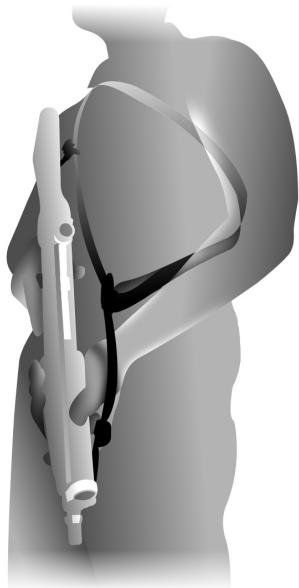

The completed Giles HK sling should look like this when attached to an MP5 submachinegun and properly worn by the operator.

WARNING:

Mishandling of firearms may cause serious injury or death. Before practicing with your Original Giles Tactical Sling™ make sure your weapon is unloaded and pointed in a safe direction. When handling the firearm, make sure your index finger remains straight along the weapon's frame and not in contact with the trigger! **Do not touch the trigger until your sights are on the target and you are ready to fire.** If the sling interferes with the safe operation or handling of the weapon, discontinue use. For further safety considerations, consult the owner's manual of your weapon and seek professional assistance.

© 2010 Wilderness Tactical Products, LLC - 082510

Wilderness Tactical Products, L.L.C. • Wilderness Plaza • 1608 W. Hatcher Rd. • Phoenix, AZ 85021
www.thewilderness.com • Call for a dealer near you! Questions/inquiries: 602/242-4945
Toll free order line: 1-800/775-5650 • Fax line: 602/242-8260