


# SLING ATTACHMENT PLATE

FOR AR-15-TYPE RIFLES  
AND SUBGUNS

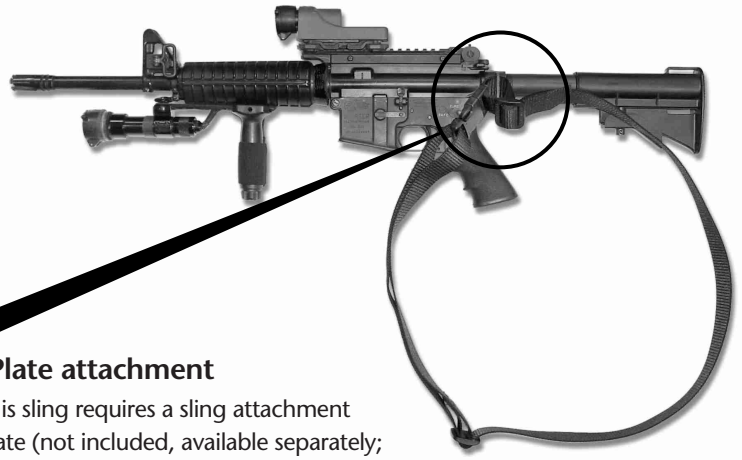

## Plate attachment

This sling requires a sling attachment plate (not included, available separately; specify right- or left-handed version).

To install this plate, the collapsible buttstock must be removed from the weapon to install it. The recoil spring/buffer assembly tube must be removed and reinstalled through the cutout in the plate. The locking collar must then be screwed down tightly to hold it in place against the lower receiver. This should not be attempted without proper gunsmithing tools and a thorough knowledge of AR assembly procedures.

## Sling attachment

The sling is attached by sliding the tail of the webbing through the loop on the sling attachment plate from back to front. Pass the webbing tab through the rear slot of the male section of the buckle as shown, then thread it through the tri-glide buckle to secure it.

© 2002 GG&G. All rights reserved. Reproduction in whole or in part is prohibited. 060802

3602 East 42nd Stravenue • Tucson, AZ 85713 • Phone: 520/748-7167 • Fax: 520/748-7583 • [www.gggaz.com](http://www.gggaz.com)